



R.C. Column  
to similar dimension as existing  
column 420x420 Approx.  
8-N16 bars  
R10 ties @ 300 c/c,  
50mm cover.




**SECTION 6**  
Scale: 1:20

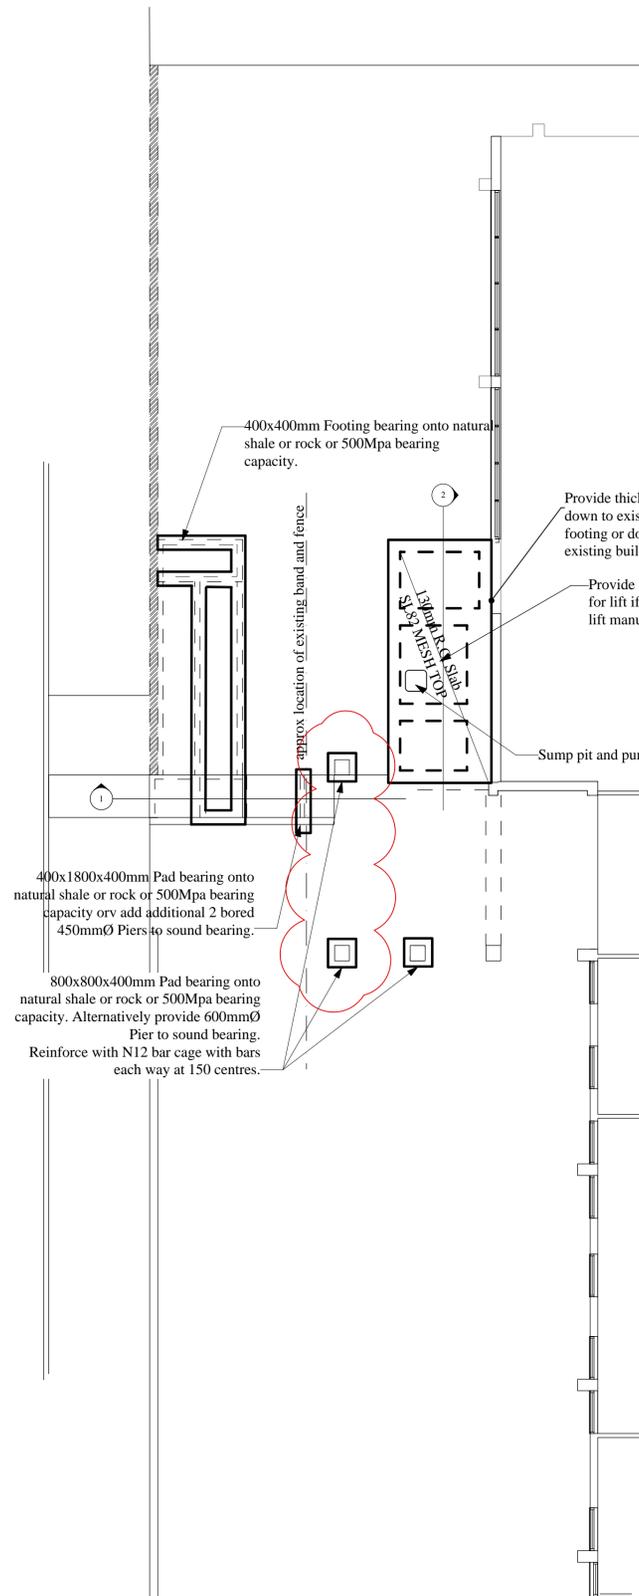

**LAYOUT OF FOOTINGS**  
Scale: 1:100

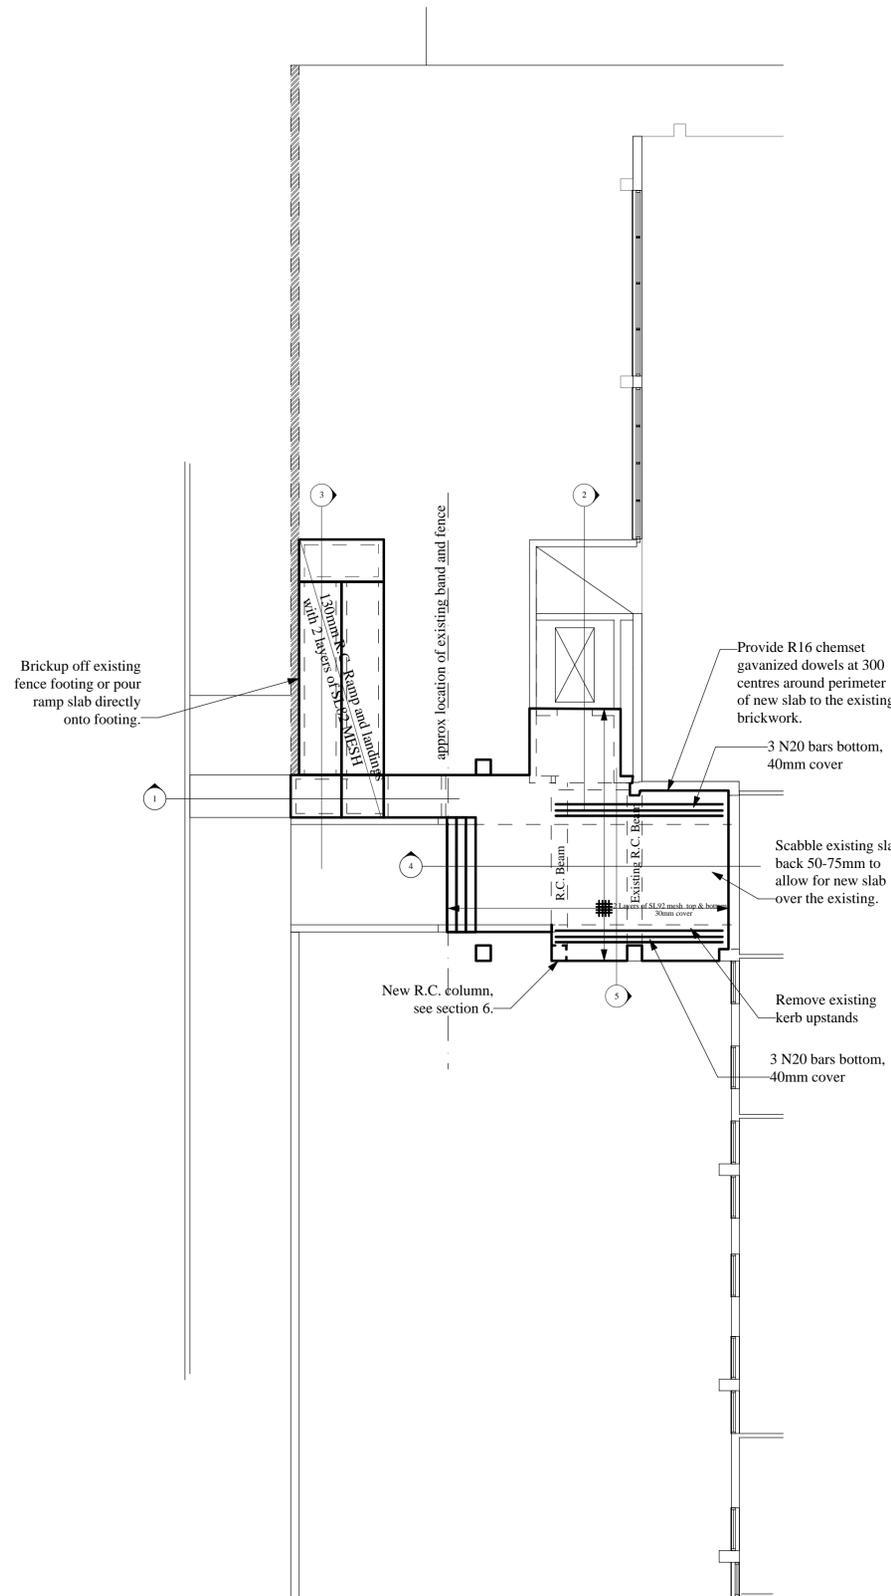

**LAYOUT OF LOWER LIFT SLAB.**  
Scale: 1:100

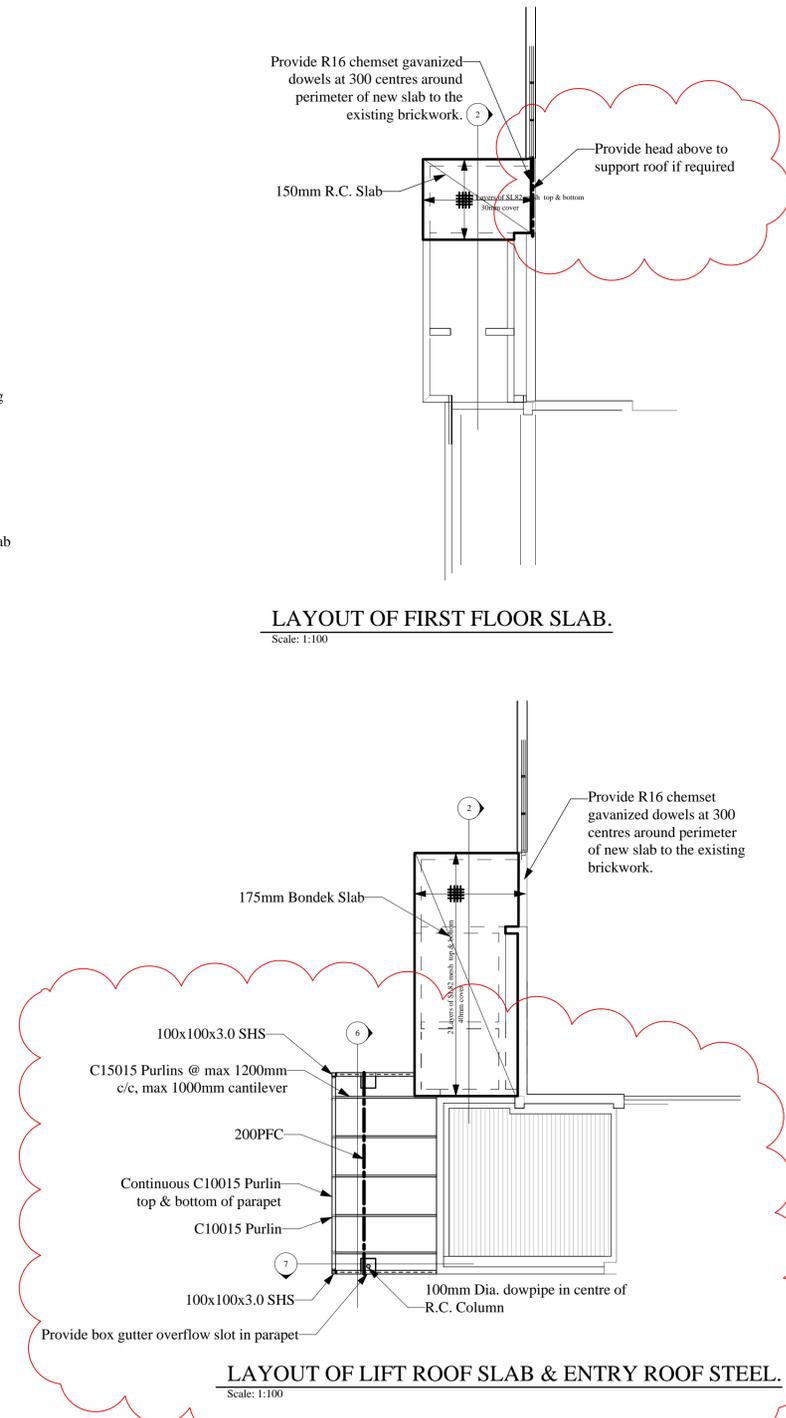

**LAYOUT OF LIFT ROOF SLAB & ENTRY ROOF STEEL.**  
Scale: 1:100

**DRAWING NOTES**

**GENERAL:**

G1. These drawings shall be read in conjunction with all architectural and other consultants drawings and specifications and with such other written instructions as may be issued during the course of the contract. All discrepancies shall be referred to the Engineer for decision before proceeding with the work.

G2. Dimensions shall not be obtained by scaling the structural drawings.

G3. Setting out dimensions shown on the drawings shall be verified by the builder. During construction the structure shall be maintained in a stable condition and no part shall be overstressed.

**DESIGN LOADS**

L1. The structural work on these drawings has been designed in accordance with the SAA Loading Code AS1170 Part 1 and 2, current edition with amendments; or the following Live Loads:

**FOUNDATIONS**

F1. Footings have been designed for an allowable bearing intensity of \_\_\_\_\_ Foundation material shall be approved for this pressure before placing concrete.

**CONCRETE**

C1. All workmanship and materials shall be in accordance with AS 3600.

C2. Concrete quality shall be as per the following table, quality shall be verified by testing as described in AS 3600.

Element	Slump mm	Maximum Aggreg. Size (mm)	Cement Type	Admixture	Concrete Grade MPa
Footings	80	20	GB	-	25
Slabs on Ground	80	20	GB	-	25
Suspended Slabs	80	20	GP	-	32

C3. Construction joints where not shown on the drawing shall be referred to the Engineer for approval.

C4. No holes of chases other than those shown on the structural drawings shall be made in concrete members without prior approval of Engineer.

C5. Pipes of conduits shall not be placed within concrete members unless shown on the drawings.

C6. Unless noted otherwise beam depths are written first and include slab thickness if any. Concrete mix for steel encasement to be 1:2:4.

C7. Stripping of concrete formwork shall be strictly as per AS 3610. Any queries shall be referred to Engineer prior to commencement of stripping.

C8. Where secondary tie bar are not shown provide \_\_\_\_\_ at \_\_\_\_\_.

C9. Formwork to remain in position for a minimum of \_\_\_\_\_ days.

C10. Concrete shall be moist cured for 7 days and protected at all times from excessive temperature.

**REINFORCEMENT**

R1. Reinforcement is represented diagrammatically. It is not necessarily in true proportion.

R2. Splices in reinforcement shall not be made other than where shown on drawings, unless approval is obtained from Engineer. Where the lap length is not shown it shall be sufficient to develop the full strength of the reinforcement. Welding of reinforcement shall not be permitted unless shown on the drawings. Cold worked reinforcement shall not be cut on site by oxy torch. Such reinforcement is to be cut by saw only.

R3. Clear concrete cover to reinforcement shall be as follows:

CAST IN FORMS COMPLYING WITH AS 3610			
ELEMENT	CONDITION 1 Not exposed to weather, ground, water or fresh water	CONDITION 2 To be exposed to weather, ground, water or fresh water	CONDITION 3 Cast against other formwork or the ground
Pad footings or pile caps	-	65	75
Strip footing	-	50	65
Bored or cast Piers	-	50	75
Walls incl. retaining walls	20	20	65
Beams	25	40	65
Slab incl. joint & hollow block construction	20	30	65

R5. Slabs poured over a membrane on ground are Condition 2.

R6. All reinforcing bars shall comply with AS 1302. All fabric shall comply with AS 1303 and AS 1304 and shall be supplied in flat sheets.

R7. Reinforcement symbols:

S - Structural grade deformed bar to AS 1302.  
C - Cold worked deformed bar to AS 1302.  
R - Structural grade round bar to AS 1302.  
F - Hard drawn wire fabric to AS 1304.

R8. Fabric reinforcement to be lapped 300 min. at ends and side. Laps in positions of maximum moments are not permitted.

R9. All reinforcement shall be firmly supported on insulated steel or plastic chains at not greater than 900 centres both ways. Rods shall be tied at alternate intersections.

**BRICKWORK AND BLOCKWORK**

B1. All workmanship and materials shall be in accordance with AS 3700.

B2. Strength of bricks, class of blocks, and type of mortar shall be \_\_\_\_\_ and shall be verified by test according to relevant standards.

B3. Allowance is to be made for expansion in external brickwork and blockwork walls by providing joints at 8.0m centres as shown on the drawing or as instructed by the Architect or Engineer. Articulated walling should be in accordance with CN9 from the Cement and Concrete Association.

B4. Loadbearing brickwork or blockwork supporting concrete or steel members shall be trowelled smooth and separated at the bearing surface by 2 layers of metal bond break or equivalent.

B5. Non-loadbearing brickwork or blockwork to have a layer of camite or equivalent on top course to separate from member over.

B6. Brickwork or blockwork shall not be built on suspended slabs or beams until all props and work under have been removed.

B7. Cleanout openings shall be provided in bottom course of all reinforced blockwork.

**STRUCTURAL STEEL**

S1. Fabricate and erect all structural steelwork in accordance with AS 1250 and AS 1554. Except where varied by the contract documents.

S2. Connections shall be provided to carry the reactions shown unless otherwise detailed.

S3. The builder shall prepare workshop drawings and submit them for approval. Fabrication shall not commence until approval has been received.

S4. Unless otherwise noted use:  
ø10 mm thick gasket, fit and end plates weld all round.  
øM16 Commercial class bolt.  
ø6 mm Continuous fillet welds.  
Electrodes to conform to AS 1555.

S5. Provide temporary bracing in accordance with specification. Do not grant under base plates until first level steelwork is plumb and fixed by welding or bolting. Prepare and finish steelwork surfaces as specified, or as follows:-

S6. NOTE: ALL SAA PUBLICATIONS TO BE CURRENT AND READ IN CONJUNCTION WITH THEIR VARIOUS PARTS AND/OR AMENDMENTS.

**JORDAN, MEALEY & PARTNERS PTY. LTD.**  
Consulting Civil-Structural Engineers  
Suite 3.10 Beverly Ave, Warilla, (02) 4297 2199 Fax: (02) 4296 6523  
69 Auburn St., Wollongong, (02) 4227 1475 Fax: (02) 4227 1818  
P.O.Box 137, Warilla 2528. A.C.N. 075 099 795

**Proposed Alterations Structural Details.**  
For: ARTAS  
At: Glen Innes RTA

**REVISIONS:** C2

Date: 14/6/11	Designed: G.M.	Job Number: 20100255-GME
Drawn: G.M.	Checked:	Scale: As Shown
		SO1/C2