


## 2. DIMENSIONAL DRAWING OF OUTRIGGER WIDTH

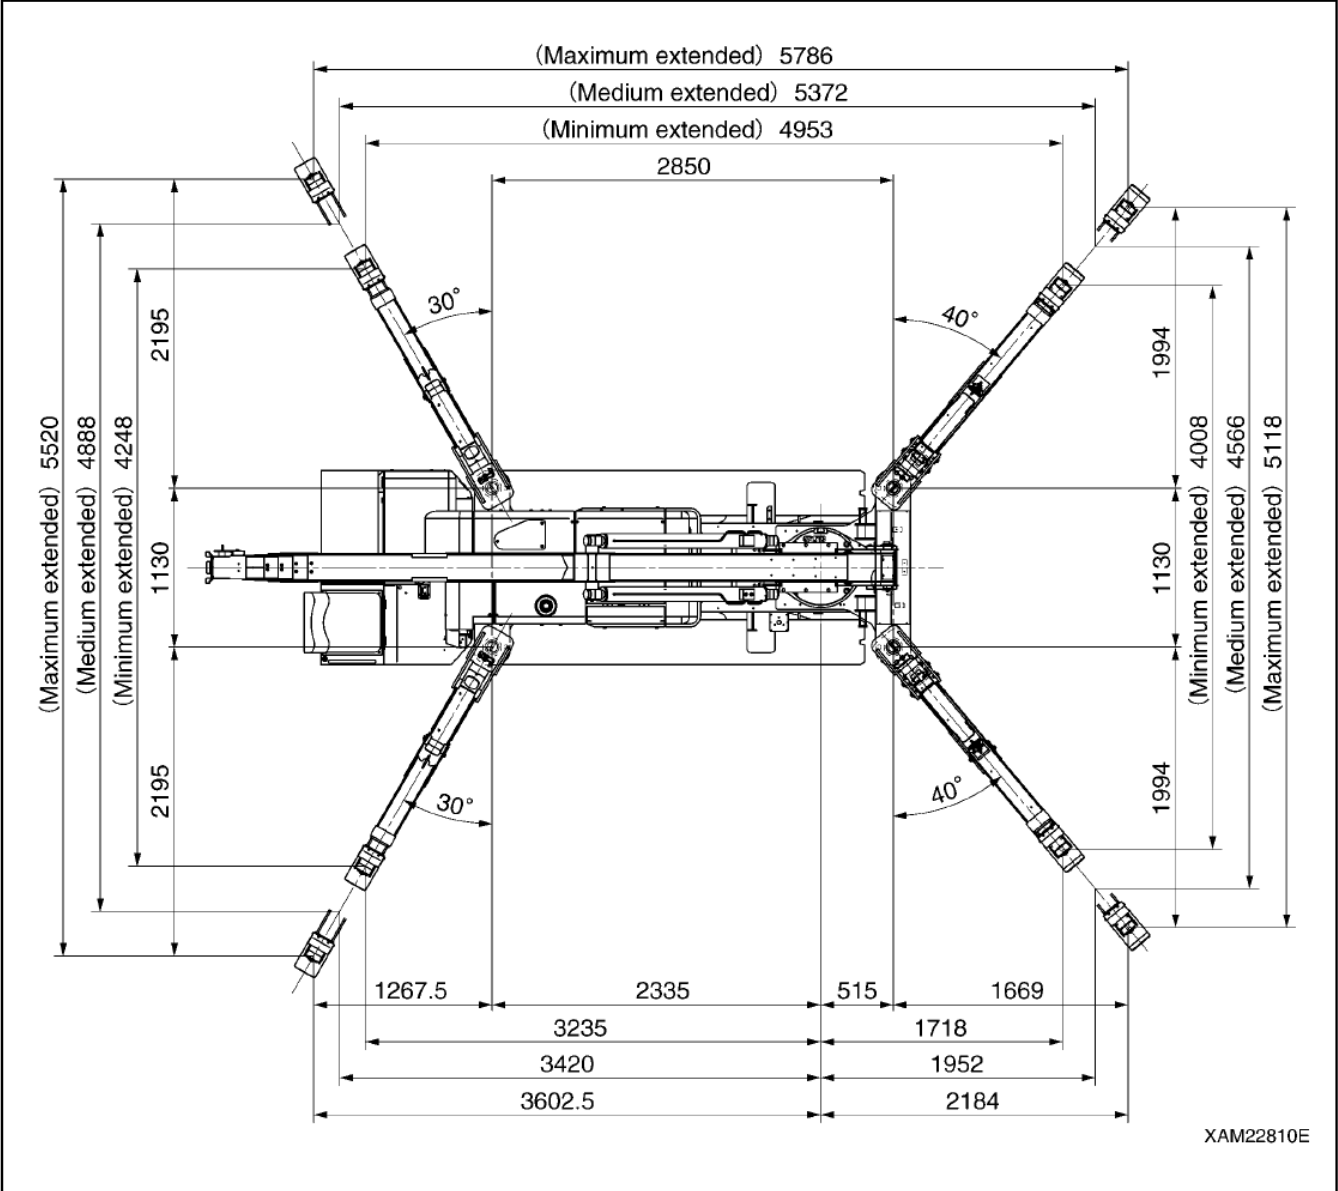

## 6. TOTAL RATED LOAD CHART

[1] TOTAL RATED LOAD CHART AT WIRE ROPE 4 FALLS

OUTRIGGER EXTENDED TO MAXIMUM							
BOOM ①+②		BOOM ①+②+③		BOOM ①+②+③+④		BOOM ①+②+③+④+⑤	
Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)
2.60	3830	3.28	3030	4.00	2230	5.00	1130
3.28	3030	4.00	2480	4.50	1930	5.50	980
4.00	2480	5.00	1980	5.00	1730	6.00	910
5.00	1980	6.00	1660	6.00	1400	7.00	760
6.00	1660	7.00	1380	7.00	1180	8.00	650
7.00	1380	8.00	1130	8.00	1030	9.00	600
7.25	1330	9.00	880	9.00	930	10.00	550
—	—	10.20	580	10.00	830	11.00	490
—	—	—	—	11.00	690	12.00	440
—	—	—	—	12.00	530	13.00	380
—	—	—	—	13.10	430	14.00	320
—	—	—	—	—	—	15.00	260
—	—	—	—	—	—	16.00	210

OUTRIGGER EXTENDED TO MEDIUM							
BOOM ①+②		BOOM ①+②+③		BOOM ①+②+③+④		BOOM ①+②+③+④+⑤	
Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)
2.60	3830	3.28	3030	4.00	2230	5.00	1130
3.28	3030	4.00	2480	4.50	1830	5.50	980
4.00	2480	5.00	1880	5.00	1630	6.00	910
5.00	1880	6.00	1430	6.00	1330	7.00	730
6.00	1430	7.00	1130	7.00	1080	8.00	630
7.00	1160	8.00	880	8.00	880	9.00	550
7.25	1120	9.00	740	9.00	730	10.00	480
—	—	10.20	490	10.00	530	11.00	430
—	—	—	—	11.00	480	12.00	380
—	—	—	—	12.00	430	13.00	330
—	—	—	—	13.10	330	14.00	280
—	—	—	—	—	—	15.00	220
—	—	—	—	—	—	16.00	180

OUTRIGGER EXTENDED TO MINIMUM							
BOOM ①+②		BOOM ①+②+③		BOOM ①+②+③+④		BOOM ①+②+③+④+⑤	
Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)
2.60	3830	3.28	3030	4.00	2230	5.00	1130
3.28	3030	4.00	2480	4.50	1830	5.50	980
4.00	2480	5.00	1680	5.00	1630	6.00	880
5.00	1680	6.00	1180	6.00	1180	7.00	730
6.00	1180	7.00	880	7.00	830	8.00	530
7.00	930	8.00	730	8.00	680	9.00	450
7.25	780	9.00	580	9.00	550	10.00	420
—	—	10.20	400	10.00	430	11.00	370
—	—	—	—	11.00	380	12.00	330
—	—	—	—	12.00	350	13.00	280
—	—	—	—	13.10	310	14.00	240
—	—	—	—	—	—	15.00	190
—	—	—	—	—	—	16.00	150